


Guidance Document for the submission of RDP Measures which include infrastructure, rubble walls and trees.

6th June Version 1.1

Below are exemplars that are to be used as guidance by architects preparing supporting documentation for RDP Measures.

A) General: A zoomed out site plan of site¹, on official PA Sheet as in the example below:

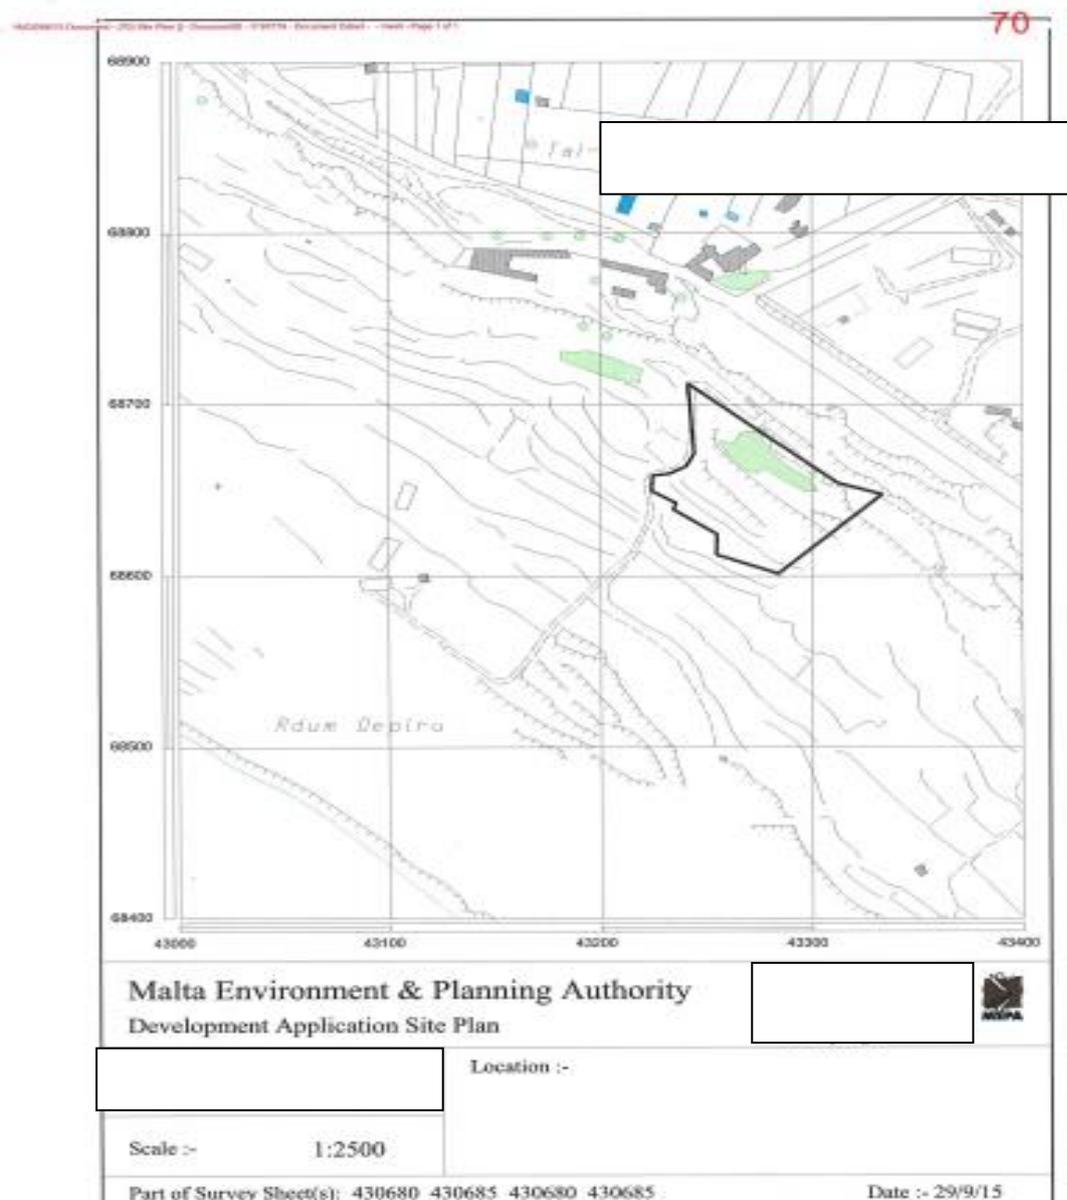

¹ The most recent orthophoto from the Planning Authority (PA) or similar imagery should be used. Interventions are to be clearly indicated with an adequate legend.

B) In case of rubble wall interventions;

- i) Clear indication of the registered parcel number
- ii) Clear site plan indicating the extent of Rubble wall to be newly built in blue
- iii) Clear site plan indicating the extent of rubble wall to be restored in red, as in the example below:



Length of rubble wall to be always specified in running meters as standard (not feet, or square canes), and newly built to be stated separately than that of restoration.

Total running metres for restoration _____

Total Cubic Metres for restoration (m³) _____

Total running metres for construction _____

Total Cubic Metres for construction (m³) _____


iv) It is important that BOQ's are indexed to correspond with the site plan, for example each rubble wall could be marked on the site plan with the 'Item No' on both the quotation and the site plan.

ITEM NO	Description of Works	QTY	Unit
1	Cleaning and dismantling of the Existing damaged rubble walls	1	LS
2	Excavation for foundation for Rubble walls	84.36	cu m
3	Excavation for storm water route	342.91	cu m
4	Building of wall no 1 (2.8meters high)	93.34	MTR
5	Building of wall no 2 (2.2 meters high)	127.52	MTR
6	Building of wall no 3 (1.3 meters high)	67.06	MTR
7	Building of wall no 4 (2.8meters high)	78.51	MTR
8	Building of wall no 5 (1.8 meters high)	30.43	MTR
9	Building of wall no 6 (1.3 meters high)	69.67	MTR
10	Building of wall no 7 (1.3 meters high)	44.77	MTR
11	Supply of rubble stone for all the above walls	1	LS

v) Photos provided should be clearly marked on a separate site plan, showing both the location and the orientation of the photo.

C) In case of removal and planting of trees²:

- i) Each tree to be removed is to be clearly marked
- ii) Each tree to be planted is to be clearly marked, including;
- iii) Clear indication of the registered parcel number.

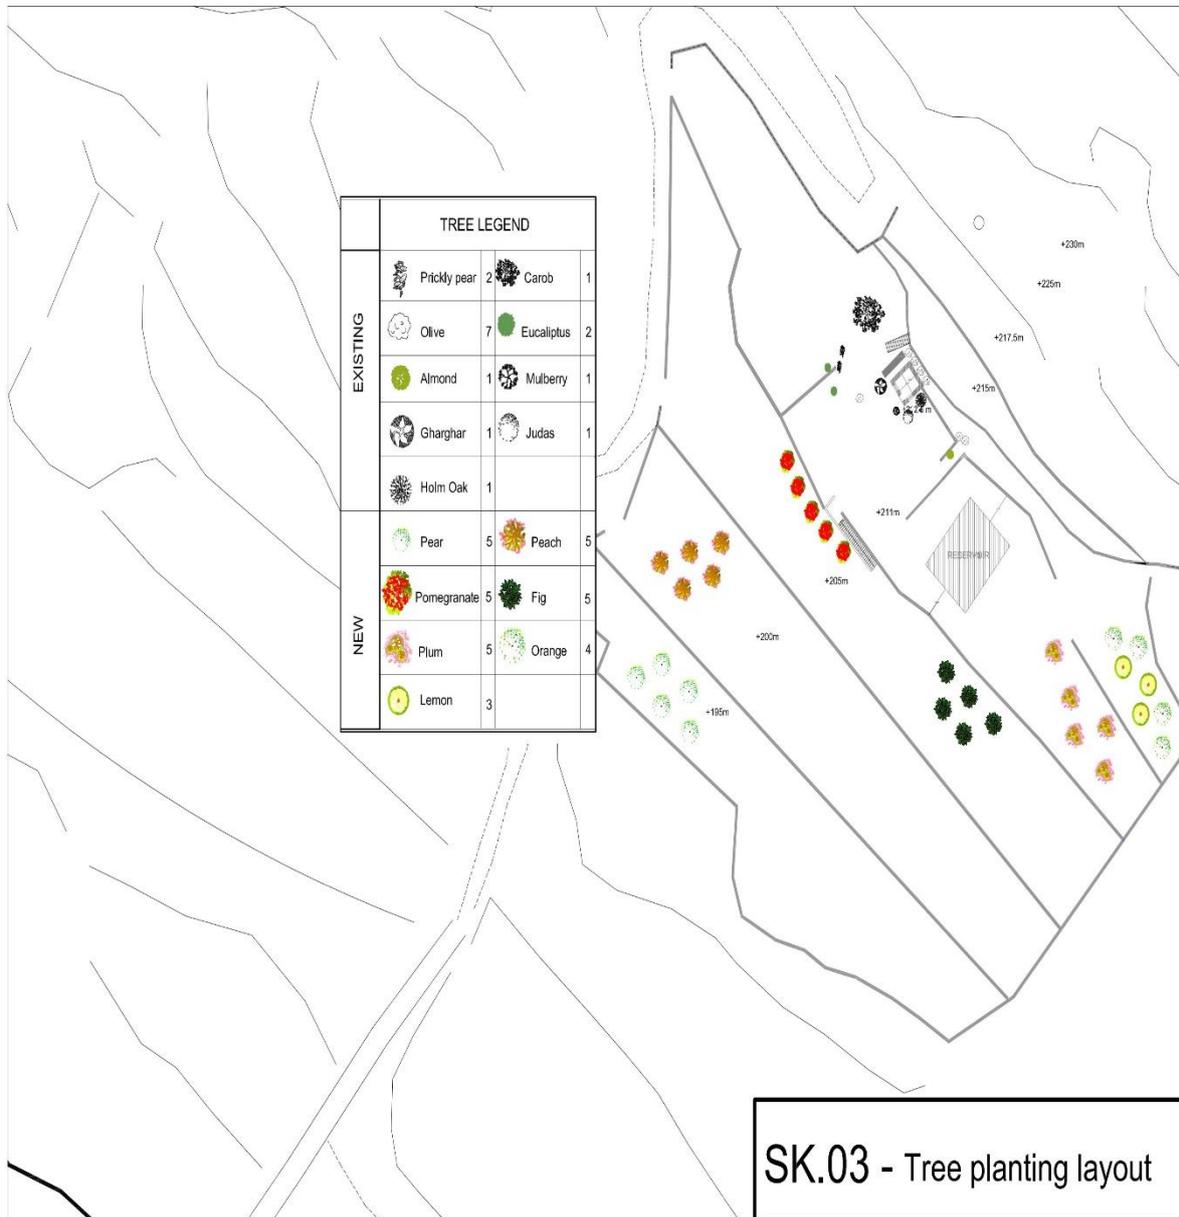

D) In case of structural works provide us with an architectural plan (example below). The architectural plan should have a detailed legend of existing works and works that the beneficiary has applied for.

² Interventions are to be clearly indicated with an adequate legend.

